



**Laykold**  
**TRADITIONAL  
HARD  
COURTS**

**CHOOSE US OPEN QUALITY**

Laykold is manufactured in the USA, Australia and Germany in ISO 9001 and ISO 14001 factories. Laykold is the only court surface made in three continents to these highest standards.

**Laykold** Advantage

**Laykold** ColorCoat

**Laykold** ColorFlex

# Laykold®

OFFICIAL COURT SURFACE OF THE  
**US OPEN**

**APT** ADVANCED  
POLYMER  
TECHNOLOGY

## STANDARD COLORS

Certified Quality

### THE WORLD'S MOST TRUSTED COURT SURFACE



LAYKOLD  
FOREST GREEN



LAYKOLD  
DARK GREEN



LAYKOLD  
MEDIUM GREEN



LAYKOLD  
GRASS GREEN



LAYKOLD  
DARK BLUE



LAYKOLD  
LIGHT BLUE



LAYKOLD  
PRO BLUE



LAYKOLD  
ROYAL PURPLE



LAYKOLD  
BRICK RED



LAYKOLD  
BURGUNDY



LAYKOLD  
DARK GREY



LAYKOLD  
DESERT SAND



TECH HUB

For color combinations and system information  
visit the Laykold Technical Hub.

[www.sportgroup-techhub.com/laykold](http://www.sportgroup-techhub.com/laykold)

Colors are as accurate as possible. Slight variations may occur due  
to job site conditions, mixing proportions and installation methods.



**CUSTOM  
COLORS**  
are available

**Laykold®**

NEW  
COURTS  
PLEASE

[WWW.LAYKOLD.COM](http://WWW.LAYKOLD.COM)

| [WWW.ADVPOLYTECH.COM](http://WWW.ADVPOLYTECH.COM)

| 724.452.1330



**US OPEN**

**MIAMI OPEN**

**DALLAS OPEN**

**TOURNAMENT COLOR CHART**

As seen at the US Open, Miami Open and Dallas Open.

**GIVE YOUR COURTS  
THE LOOK OF THE WORLD'S  
BIGGEST TOURNAMENTS.**

Laykold is trusted and chosen by the US Open, Miami Open and Dallas Open.

Whether it's the prestige of the US Open, the blue sizzle of the Miami Open or the sophistication of the Dallas Open, now you can get the same quality colors for your club, school or residence, exclusively through Laykold.

Laykold offers more colors than any other court surface  
**GET INSPIRED TODAY!**

**Laykold**<sup>®</sup>

CONTACT US:  
**+1 888-384-2460 WWW.LAYKOLD.COM**

Disclaimer: Please note: Colors shown are as accurate as possible. Slight variations may occur due to job site conditions, mixing proportions and installation methods

**US OPEN  
GREEN**

**US OPEN  
BLUE**

**OASIS  
BLUE**

**BISCAYNE  
BLUE**

**SCARLET  
RED**

**MIDNIGHT  
BLUE**

# Laykold®

OFFICIAL COURT SURFACE OF THE  
**US OPEN**

**APT** ADVANCED  
POLYMER  
TECHNOLOGY

## VIBRANT COLORS

Certified Quality

### THE WORLD'S MOST TRUSTED COURT SURFACE



LAYKOLD  
CORAL



LAYKOLD  
SCARLET



LAYKOLD  
PUMPKIN



LAYKOLD  
CANARY



LAYKOLD  
MIDNIGHT



LAYKOLD  
TEAL



LAYKOLD  
ARCTIC



LAYKOLD  
BLACK



LAYKOLD  
KEY LIME



LAYKOLD  
KIWI



LAYKOLD  
SILVER



LAYKOLD  
MOCHA



TECH HUB

For color combinations and system information  
visit the Laykold Technical Hub.

[www.sportgroup-techhub.com/laykold](http://www.sportgroup-techhub.com/laykold)

Colors are as accurate as possible. Slight variations may occur due  
to job site conditions, mixing proportions and installation methods.



**CUSTOM  
COLORS**  
are available

**Laykold®**

NEW  
COURTS  
PLEASE

[WWW.LAYKOLD.COM](http://WWW.LAYKOLD.COM)

| [WWW.ADPOLYTECH.COM](http://WWW.ADPOLYTECH.COM)

| 724.452.1330



**Nike Stanton Street  
Courts by KAWS**

**Andrew Jackson  
Elementary School,  
Santa Ana CA  
Soccer Court**



# TRADITIONAL HARD COURTS

## Laykold Advantage


Comprised of factory textured colors using a proprietary blend of silica sands. Batch mixing is simplified, resulting in superior quality control and a consistent surface pace regardless of location or applicator. Designed for more demanding sports traffic.

## Laykold ColorCoat

A durable, fade and wear resistant, all-weather tennis, pickleball and court surface, designed to beautify asphalt and/or concrete substrates while providing the desired speed of play. Laykold ColorCoat gives the applicator the ability to adjust surface pace by adding texture onsite

## Laykold ColorFlex

This highly flexible and premium quality surface is recommended for today's problematic asphalt substrates. Laykold NuSurf, which has 800% greater elongation properties, replaces the acrylic resurfacer. ColorFlex is also ideal for cushioned courts, fabric crack repair and overlay court systems.

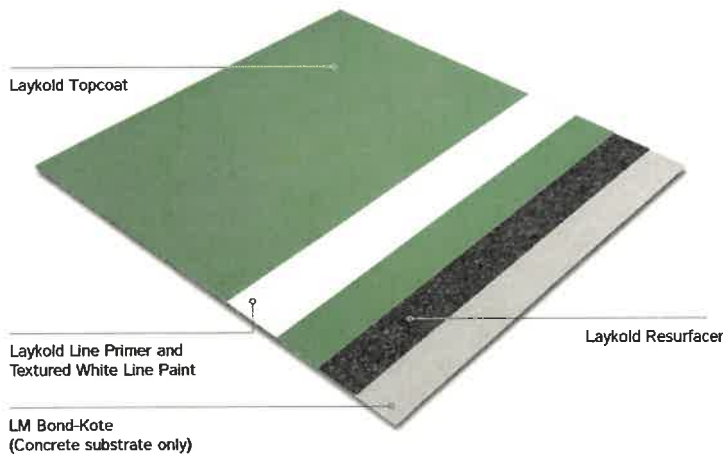

These systems are high-performance 3-4 coat acrylic systems with a hard-wearing and long-lasting non-slip surface. Laykold's traditional hard courts feature US Open-quality top coats that deliver Grand Slam performance.



### ADVANTAGE HIGHLIGHTS

- Certified quality
- Designed for more demanding sports traffic
- Can be calibrated to meet desired court pace
- Delivers Pace Precision consistency
- Environmentally friendly - does not contain asbestos, lead or mercury
- Largest color selection on the market
- Custom colors available
- 2 year manufacturer warranty

### COLORCOAT & COLORFLEX HIGHLIGHTS

- Certified quality
- Can be calibrated to meet desired court pace
- Delivers Pace Precision consistency
- Environmentally friendly - does not contain asbestos, lead or mercury
- Largest color selection on the market
- Custom colors available
- 1 year manufacturer warranty

### SPORTS

Tennis, Pickleball, Netball, Basketball, Futsal, Multi-sports



#### FOR MORE INFORMATION:

- [www.laykold.com](http://www.laykold.com)
- [www.sportgroup-techhub.com/laykold](http://www.sportgroup-techhub.com/laykold)
- [info@laykold.com](mailto:info@laykold.com)
- 724.452.1330
- 109 Conica Lane Evans City PA 16033 USA





## US Open Performance! ISO Quality!

**Trusted and chosen** for the U.S Open, Miami Open, and many other prestigious hard court events, **Laykold** is the world's premier court surface.

The only court surface brand to combine Grand Slam performance with **ISO certified quality**, **Laykold** provides an elite status to sport and recreational facilities worldwide. Name your game...tennis, pickleball, basketball, futsal, game courts, or urban play spaces...**Laykold** has the ideal court surface to satisfy every need and desire from recreational enthusiasts to the world's highest ranked professional athletes.

**Be inspired** by the court colors of the world's leading tournaments...US Open, Miami Open and Dallas Open...available exclusively by **Laykold**. Or, be creative with your own unique color combinations to match your club, school or personal preference.

**Laykold**, Sport Group's global court brand, is manufactured by **APT**, an **ISO 9001:2015 Quality Management Certified & 14001:2015 Environmentally Compliant** manufacturer, in Evans City, PA.

## Product features

|  | HARDCOURT            |                           |               | CUSHION COURT                    |                             |             |                          |                  |              |                                  |
|--|----------------------|---------------------------|---------------|----------------------------------|-----------------------------|-------------|--------------------------|------------------|--------------|----------------------------------|
|  | COLORCOAT, COLORFLEX | ADVANTAGE, PICKLEBALL PRO | MASTERS COLOR | CUSHION PLUS, PICKLEBALL PROPLUS | MASTERS 5, FLOAT PICKLEBALL | MASTERS GEL | MASTERS 8, FLOAT, INDOOR | MASTERS MONTREAL | MASTERS ROME | MASTERS PICKLEBALL GEL, GEL PLUS |
| Custom colors available  | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| UV stable colors   | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Slip resistant, injury reduction                                     | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Long lasting, recoatable   | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Glare resistant  | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Environmentally friendly, no heavy metals or solvents                | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Specifically designed for demanding sports traffic                   |                      | ■                         |               |                                  |                             |             |                          |                  |              |                                  |
| Cushioned system   |                      |                           |               | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| 1 year warranty  | ■                    | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| 2 year warranty  |                      | ■                         | ■             | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| 5 year warranty  |                      |                           | ■             |                                  | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Designed for existing substrates with cracks or imperfections        |                      |                           |               | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Excellent force reduction<br>Cushion level 10%+                      |                      |                           |               | ■                                | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Outstanding force reduction<br>Cushion level 14%+                    |                      |                           |               |                                  | ■                           | ■           | ■                        | ■                | ■            | ■                                |
| Premium force reduction<br>Cushion level 20%+                        |                      |                           |               |                                  |                             | ■           | ■                        | ■                | ■            | ■                                |
| Superior force reduction<br>Cushion level 60%+                       |                      |                           |               |                                  |                             |             | ■                        | ■                | ■            | ■                                |
| Features APT's Green Technology                                      |                      |                           |               |                                  |                             | ■           |                          |                  |              | ■                                |
| Structurally reinforced playing surface                              |                      |                           |               |                                  |                             |             | ■                        | ■                | ■            |                                  |
| Uses a wood subfloor system for superior shock absorption            |                      |                           |               |                                  |                             |             |                          | ■                | ■            |                                  |
| Versatile and can be used for retrofits, new installations, overlays |                      |                           |               |                                  |                             |             |                          | ■                | ■            |                                  |
| Use for events and as a temporary surface system                     |                      |                           |               |                                  |                             |             |                          |                  | ■            |                                  |

# Laykold



THE WORLD'S MOST TRUSTED COURT SURFACE



### FOR MORE INFORMATION:

- www.laykold.com
- www.advpolytech.com
- info@laykold.com
- 724.452.1330
- 109 Conica Lane, Evans City PA 16033 USA

Laykold manufactured in the USA by



# Sports Surfaces

## Cleaning and Care Instructions



**Advanced Polymer Technology's Laykold** surfaces normally require only minimal maintenance. However, the amount of maintenance required will depend largely on the local atmospheric environment and court usage. Environments subject to heavy airborne pollution, such as dust, leaves, and traffic fumes, are classified as high maintenance areas. Low maintenance areas enjoy low levels of pollution and dust, such as indoor, and are classified accordingly.

### 1. Initial Acrylic Coatings Cure

#### a) Outdoor

Courts should be allowed a minimum of 3 months before any type of scrubbing equipment is used to clean the surface and a minimum of 12 months (1-year) before the surface can be pressure-washed.

#### b) Indoor

Courts should be allowed a minimum of 6 months before any type of scrubbing equipment is used to clean the surface.

### 2. Low Maintenance Environment

#### a) Outdoor

Courts should be swept with broom, air blower, or water broom approximately once per week depending on severity of surface contamination. Foreign debris should be hosed off with clean water, where practical.

#### b) Indoor

Indoor surfaces should be cleaned once every 2 to 4 weeks (after initial curing period) depending on court usage with a Tennant T5 walk behind or comparable cleaning machine to remove any dust, dirt, etc. Heavy contamination or staining should be removed using a wet scrubber/vacuum machine comparable to a Tennant T5 walk behind with soft brush attachment as in 2(b). On textured surfaces, foreign debris should be swept and hosed off regularly, if hosing is possible.



### 3. High Maintenance Environment

Heavy airborne pollution, such as dust, leaves, and vehicle fumes, tend to settle rapidly onto the court surface.

In a heavy maintenance environment, APT recommends that foreign debris be hosed off at least once a week to minimize buildup of pollutants. Should the surface become generally dirty or stained, the surface can be cleaned with a light duty wet scrubber/vacuum machine with a soft brush attachment (after initial cure period). A non-residual organic cleaner should also be utilized to aid in the cleaning of the surface. The percentage of cleaner to the percentage of water will largely depend on the degree of surface contamination and should be used in accordance with the manufacturer's specifications for the surface type and stain.

After light scrubbing, hose off with fresh water to remove any residual cleaning agent in outdoor environment, or wet scrub/vacuum with clean fresh water in indoor environment.

**Note:** Contact your local authority prior to commencement of cleaning to conform to the environment requirements in your area.

### 4. Mold Growth and Tree/Plant Contamination

It is recommended that overhanging trees/plants be controlled to prevent excessive contamination of the surface, some trees/plants will cause staining and unsightly contamination.

Mold may buildup on areas of the surface where plant/leaf contamination occurs or where pooling water occurs after rain. These areas should be cleaned on a regular basis using the following methods:

- a) Hose off foreign debris with the aid of a stiff bristle broom.
- b) Saturate the surface with clean water
- c) Use a dilute solution of sodium hypochlorite (liquid pool chlorine); dilution rate is dependent on the severity of mold growth.
- d) Broom solution over the mold area and soak for 10-15 minutes. Do not allow to dry.
- e) Hose off surface thoroughly with clean water to remove all residual solution. Keep away from plants, animals, and children and wear protective clothing. Solution is strong bleach.
- f) More heavily contaminated surfaces may require additional treatment or in severe cases, high- pressure water blasting and sodium hypochlorite treatment. Other algaecides are commercially available.

**Test First...** Testing of all cleaning methods and their effects on the Laykold surface is recommended before any general use.



**Note:** Do not use powdered Calcium Hypochlorite solution as this will leave a white residue on the surface after drying.

**Note:** Contact your local authority prior to commencement of cleaning to conform to the environment requirements in your area.

## 5. Food and Drink Contamination

Immediate washing of the surface is recommended. If staining has occurred, then the same cleaning methods suggested for dirt or mold/plant/tree/bird/wildlife contamination would be recommended.

Solvent based products, i.e., solvent thinners and similar products are not to be used on **Laykold** surfaces.

Scouring type products, i.e., Ajax powder or similar are not recommended for use on **Laykold** surfaces.

## 6. Specific Contaminations

### a) Fruit Bat 'Droppings' and worms

"Droppings" and worms will cause degradation of the Laykold surface. They should be immediately removed by mechanically scraping them off or by high pressure washing.

In some cases, they will cause blistering and peeling, not only of the surface, but also the asphalt underneath to a depth of 3-6 mm. In these cases, the surface should be patched with the recommended **Laykold** surface materials. This will require specific instructions to be followed and APT would recommend that the services of a **Laykold Approved Applicator** be used for this work.

### b) Bird/Wildlife Contamination

This can usually be removed by a non-residual organic cleaner with a stiff bristle brush/broom and hose off with plenty of clean water.

### c) Shoe 'Sole' Staining and Rub Marks

APT recommends only white soled or non-staining/marking shoe types be used when playing on the surface.

Some 'black' rub marks can get onto the surface by certain types of soles on footwear. These marks can usually be removed with a non-residual organic cleaner and stiff bristle brush. Some



rubber types are difficult to remove when they are fresh, weathering will usually allow these marks to be removed. Shoe sole marking will be more noticeable and prevalent with new surfaces.

### d) Chewing Gum

It is very difficult to remove gum from court surfaces. Mechanical scraping of the gum is all that can be recommended.

### e) Grease and Oil Stains

Non-residual organic cleaner is recommended. It may require several applications to remove the grease/oil contamination. Thoroughly hose off the surface with clean water after the application of the detergent solution.

**Note:** Contact your local authority prior to commencement of cleaning to conform to the environment requirements in your area.

## 7. Racquet Damage

The **Laykold** surfaces are highly resistant to damage from normal racquet contact. However, metal racquets heavily impacting the surface at sharp angles can cause slight cuts in the surface. Such damage is usually confined to the top layers and can be readily repaired. Refer to a **Laykold Approved Distributor** for further information.

## 8. Repairs

Deep cuts into the base layer of cushioned **Laykold** surfaces may be caused by sharp implements, i.e., metal chair legs, heavy steel wheeled trolleys, stiletto heels, vandalism, etc. Chairs and umpire stands should have wooden bases on the legs to minimize damage to the surface. Contact your **Laykold Approved Distributor** immediately if any damage occurs to prevent further damage from the ingress of water.

## 9. Drying the Court Surface

**Laykold** surfaces can quickly be put back into service after a disruption by rain. Simply remove any excess water with a wide sponge roller or squeegee and play can recommence immediately. The surface is slip resistant when damp.

## 10. General Surface Care

Wear only white or non-marking flat soled tennis shoes. Wipe shoes before entering court to prevent stones, twigs, or other sharp objects from being ground into the surface.